

Air Temperature Sensor


Model 12

The Model 12 Air Temperature Sensor is intended for use in applications that monitor slowly changing temperature.

The unit gives approximately .5 °F (.25 °C) resolution when used with an 8-bit analog input.


Temperature Sensing Range

VDC Out	°C	°F
0.00	-18	0
0.25	-14.5	5.8
0.50	-11.4	11.5
0.75	-8.2	17.3
1.00	-5	23.0
1.25	-1.8	28.8
1.50	1.4	34.5
1.75	4.6	40.3
2.00	7.8	46.0
2.25	11	51.8
2.50	14.2	57.5
2.75	17.4	63.3
3.00	20.6	69.0
3.25	23.8	74.8
3.50	27	80.5
3.75	30.2	86.3
4.00	33.3	92.0
4.25	36.6	97.8

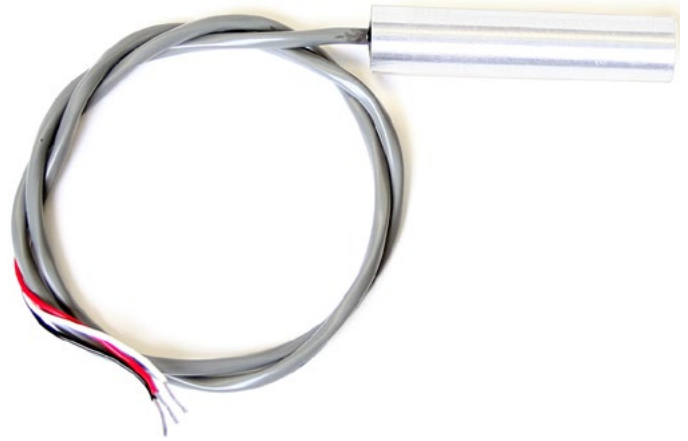

Wire Diagram

Sensor Hookup

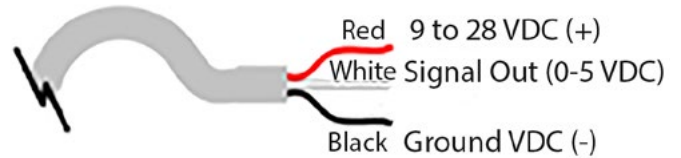

Specifications

Temperature Capability

Useful Operating Temperature Range: 0°F to 115°F (-18°C to 46°C)

Component Temperature Range: -85°F to 300°F (-65°C to 150°C)

Accuracy: 2% of full scale with software offset correction.

Voltage

Power Input Voltage: 9 to 28 VDC

Current Draw: 1mA

Cable: 2 foot length, 22 AWG, stranded

Clamp: 1/2" ID, provided (P/N 00-03-0392)

How to Order

Part Number	Model and Description	Notes
10707483	Model 12: Air Temperature Sensor	